

# Tamora II Digital

## Dynamic Mattress Overlay



The Tamora II Digital provides highly effective care and protection for patients considered to be up to a high risk of pressure ulcer development and is suitable for use in a wide range of care settings from general ward and acute care to private or nursing home care.



### Intuitive and easy to use digital system

The Tamora II Digital is a lightweight, portable system with an intuitive **digital control panel** which allows accurate and appropriate pressure settings to be customised for various weight ranges.

A clear **LCD screen** provides nursing staff with concise information on cycle time selections as well as the current operation status and fault conditions to ensure an efficient operation of the system.



### High quality pressure care management

The Tamora II Digital offers key features for the delivery of high quality pressure care to vulnerable patients.

In addition to a 10 minute cycle the system offers **variable cycle times** with the choice of extended cycle periods of 15/20/25 and 30 minutes, which may be desirable as patients begin to rehabilitate and the risk reduces. While the ability to select the **Manual Auto-Detection** feature allows patient weight/position to be automatically detected ensuring optimum patient protection and care.



### Maximised patient safety and peace of mind

Patient and carer safety are key factors in the system design. An easily accessible **CPR facility** provides rapid deflation in emergency situations, while **audible and visual alarms** for low pressure and power failure provide increased security and peace of mind.

In the event of a power failure the excellent up to 24 hour Transport mode feature provides a security buffer to allow patients to remain on an inflated surface until power can be restored.

## Features

### Power Unit


- Digital control panel
- Comfort control
- 7 litres per minute air flow
- Alternating 2-cell cycle
- Variable cycle times (10/15/20/25/30 mins)
- Automatic control panel lockout
- Manual Auto-Detection pressure setting
- Timed static mode
- Auto-Firm
- Transport mode - up to 24 hours
- Audible and visual alarms
- Adjustable hanging brackets

### Mattress

- Static head cells
- CPR Valve
- Strong cell retention knitted bands
- Maximum patient weight 200kg / 31.5 stone

### Cover

- Soft, waterproof vapour permeable PU cover
- 360 degree zipper
- Welded seams and enclosed zip
- Integral covered air pipe
- Cable management system

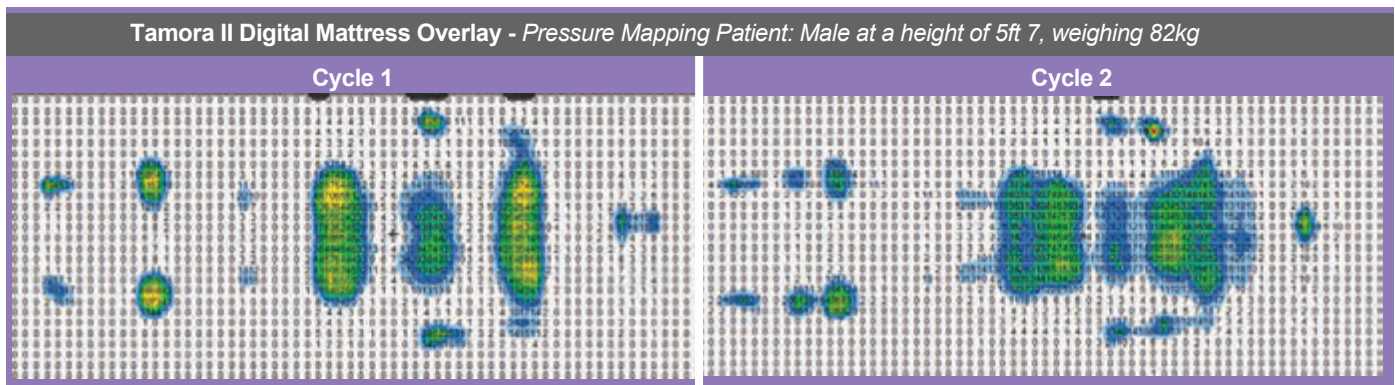

## Technical Specification

<b>Product code:</b>	UPRA3478D-2	<b>Cycle time:</b>	10 / 15 / 20 / 25 / 30 mins (2-cell cycle)
<b>Risk category:</b>	Up to high	<b>Pressure range:</b>	25-60mmHg
<b>Max user weight:</b>	200 kg / 31.5 stone	<b>Supply voltage:</b>	230V, 50 Hz
<b>Mattress dimensions:</b>	2000mm x 850mm x 130mm	<b>Fuse rating:</b>	T1A
<b>Power unit dimensions:</b>	320mm x 130mm x 230mm	<b>Current rating:</b>	0.12 A
<b>Product weight:</b>	4.9kg Mattress / 3.5kg Power Unit	<b>Classification:</b>	Class II, Type BF
<b>Cell material:</b>	Nylon PU	<b>Compliance:</b>	EN 60601-1, EN 60601-1-2
<b>Cover material:</b>	Polyester PU	<b>Warranty:</b>	2 years

**Cleaning:** Can withstand up to 10,000 ppm chlorine (to be used in conjunction with local infection control guidelines) (can be laundered up to 84°C)

### Ultimate Healthcare,

Calmore Industrial Estate, Nutsey Lane, Totton, Hampshire, SO40 3WW

tel: 0333 321 8996, fax: 0845 051 0035, email: sales@ultimatehealthcare.co.uk

[www.ultimatehealthcare.co.uk](http://www.ultimatehealthcare.co.uk)